



# Washing gun

PISTOLETS DE LAVAGE PISTOLA DE LAVADO

## Washing gun

---

### **MATERIAL MATIÈRE MATERIAL**

**BR** = Brass **Laiton Latón**

**SS** = Stainless steel **Inox**

With EPDM cover.

**Avec revêtement EPDM.**

**Con EPDM revestimiento.**

---

### **SIZE DIMENSIONS DIMENSIONES**

DN 1/2"


---

### **WATER FLOW DÉBIT D'EAU SALIDA DE AGUA**

Water flow in l/min with totally pulled trigger.



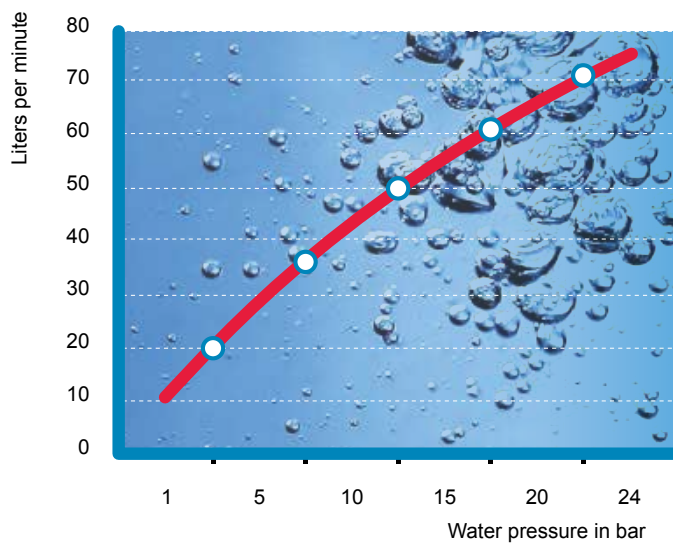


**Débit mesuré en l/min à ouverture maximale.**

**Salida de agua en l/min con apertura máxima.**








AL = Aluminium BR = Brass Laiton Latón ST = Steel Acier Acero SS = Stainless steel Inox PP = Polypropylene

## Trelleborg Fittings 2015

		ID coupling Diam. raccord Diam. racor	ID shank Diam. douille Diam. espiga	Ref.	Notes
	Blue. Eco. 95°C. 24 bar. <b>Bleu. Eco. 95°C. 24 bar.</b> Azul. Eco. 95°C. 24 bar.	BR	1/2"	510 10 70	
	Blue. Standard. 95°C. 24 bar. <b>Bleu. Standard. 95°C. 24 bar.</b> Azul. Standard. 95°C. 24 bar.	BR	1/2"	011 76 70	
	Pack of 20 * 011 76 70. <b>Pack de 20 * 011 76 70.</b> Pack de 20 * 011 76 70.	BR	1/2"	510 00 40	
	Blue. With handle protection. 95°C. 24 bar. <b>Bleu. Avec protection main. 95°C. 24 bar.</b> Azul. Con proteccion de la mano. 95°C. 24 bar.	BR	1/2"	510 10 13	
	Blue. Standard. 95°C. 24 bar. <b>Bleu. Standard. 95°C. 24 bar.</b> Azul. Standard. 95°C. 24 bar.	BR Chromated	1/2"	510 00 33	
	Blue. Light. 50°C. 12 bar. <b>Bleu. Léger. 50°C. 12 bar.</b> Azul. Lígero. 50°C. 12 bar.	PVC	1/2"	510 71 21	

■ AL = Aluminium  
 ■ BR = Brass **Laiton Latón**  
 ■ ST = Steel **Acier Acero**  
 ■ SS = Stainless steel **Inox**  
 ■ PP = Polypropylene

## Trelleborg Fittings 2015

		ID coupling Diam. raccord Diam. racor	ID shank Diam. douille Diam. espiga	Ref.	Notes
 <p>Blanc. With handle protection. 95 °C. 24 bar.  <b>Blanc. Avec protection main. 95 °C. 24 bar.</b>  <i>Blanco. Con proteccion de la mano. 95 °C. 24 bar.</i></p>	BR Chromated	1/2"		510 07 27	
 <p>Red. With handle protection. 95 °C. 24 bar.  <b>Rouge. Avec protection main. 95 °C. 24 bar.</b>  <i>Rojo. Con proteccion de la mano. 95 °C. 24 bar.</i></p>	SS 316	1/2"		510 05 26	
 <p>Black. High flow. 95 °C. 24 bar.  <b>Noir. Grand débit. 95 °C. 24 bar.</b>  <i>Negro. Gran caudal. 95 °C. 24 bar.</i></p>	BR	1/2"		510 10 64	
 <p>Spray. Blue. 80 °C. 16 bar.  <b>Lance. Bleue. 80 °C. 16 bar.</b>  <i>Spray. Azul. 80 °C. 16 bar.</i></p>	BR	1/2"		510 50 66	
 <p>Repare Pack. Except for 510 10 70.  <b>Pack réparation. Sauf pour 510 10 70.</b>  <i>Pack reparación pistola. No para 510 10 70.</i></p>	SS 316			010 00 15	